




FS 2001 L-ISO System

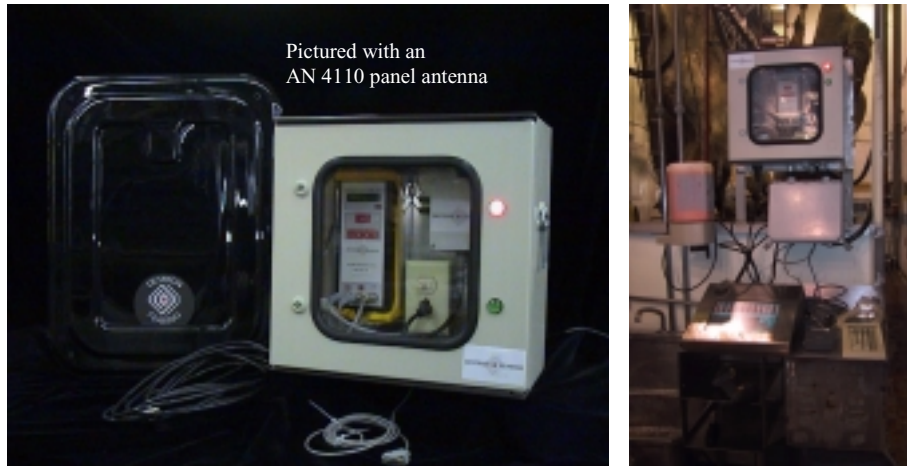

PRODUCT NUMBER: AN 4950

PRODUCT DESCRIPTION

Complete **FS 2001 L-ISO** reader system enclosed in a watertight box. Box includes FS2001L-ISO reader, external tuning box, reader power supply & light system. This box gives the reader and associated parts an added level of protection in harsh environments. Box has keyed lock for controlled access. The box is also available in non-windowed configuration. Stainless steel boxes available by special order.

SPECIFICATIONS

Approvals	Box: UL E 76083, CSA LR 59132 Box with window: Nema 12, IP 56 per EN 60 529/10.91 Box without window: Nema 4x, IP 66 per EN 60 529/10.91
Construction:	Fiberglass reinforced, unsaturated polyester GFK. Viewing window: 3mm, impact resistant, acrylic with seamless rubber gasket.
Temperature Range:	-25C to +50 C
Dimensions:	400 x 400 x 200 mm (15.75 x 15.75 x 7.87 inches)
Installation:	4 mounting holes in rear. Wall mounting brackets available.
Interface:	NEMA 6P watertight feed through for antenna and communication cables. Watertight conduit connection for required power.
Power:	95 – 250Vac, 47 – 63 Hz

A licensed electrician should attach power to the box.